


# VENTILATION SYSTEM FOR HAZARDOUS LOCATIONS & GRAIN ELEVATORS

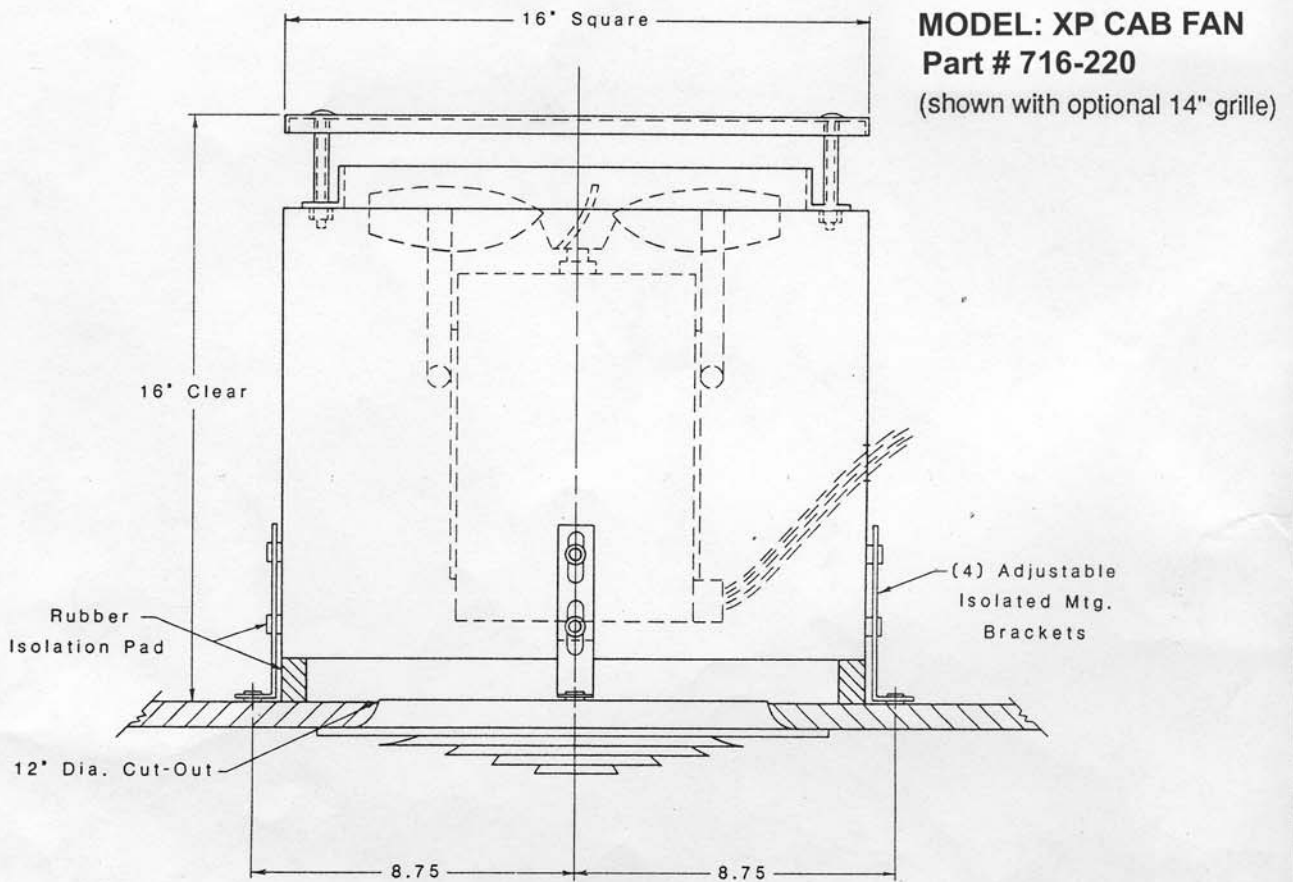


## SPECIFICATIONS

Voltage - 115                      Amperes - 4.5  
H.P. - 1/4                          R.P.M. - 1725  
Single Phase                      HZ - 60  
Continuous Duty  
Thermally protected - Automatic reset  
Explosion proof, ball bearing, split phase motor  
Non-static, cast aluminum fan blade

	Free air	1/8" SP	1/4" SP	3/8" SP
CFM Air Delivery	855	645	330	175

Electric Motor: UL listed (E29183) for Hazardous locations  
Class 1 Group DX, Class II Group EFG  
Operating Temp. 165°C, Maximum Ambient Temp. 40°  
Insulation Class A • Clockwise Rotation

## WIRING INSTRUCTIONS

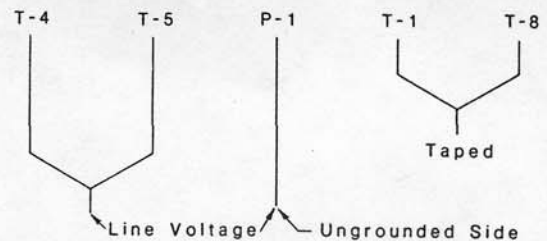

**Caution:** Motor must be grounded to prevent electrical shock. To prevent ignition of hazardous atmospheres, motor should not be installed in an area where there are vapors or gases having an ignition temperature less than 215°C.

**C.J. ANDERSON & CO.**  
4751 N. OLCOTT  
HARWOOD HEIGHTS, IL 60706-4605